



RAFVÖRUR ehf

Dalvegi 16c. 201 Kópavogur Kt:470987-1119

Sími: 568-6411 – Fax: 568-6961

rafvorur@rafvorur.is www.rafvorur.is




Fury Rheemglas® Electric Water Heater



Available in 114, 151, 189, 246, 303 and 454 Liter Tall Models

- Temperature and pressure relief valve included
- Isolated tank design reduces conductive heat loss
- High efficiency resistored heating elements
- Anode rod equalizes aggressive water action
- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Foam insulated
- Stainless steel heating element
- Maximum working pressure of 150 PSI (10 BARS)

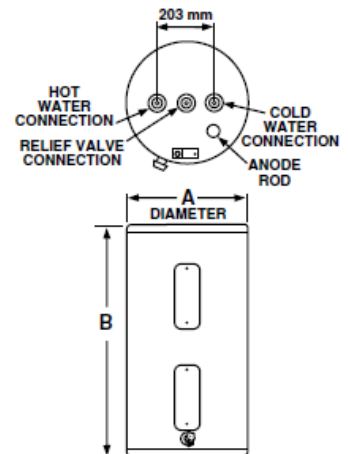

WATER CONNECTIONS ALL 3/4" N.P.T.

DESCRIPTION			FEATURES			DIMENSIONS (SHOWN IN MM)		
TANK LITER CAPACITY	HEIGHT DESCRIPTION	MODEL NUMBER	WATTS	RECOVERY IN LITERS @ 50° C RISE	FIRST HOUR DELIVERY LITERS	TANK DIAMETER A	TANK HEIGHT B	APPROX. SHIP WT. (KG.)
114	TALL	85V30-1	3000	52	132	451	1162	36
151	TALL	85V40-1	4500	77	158	502	1181	43
189	TALL	85V52-1	4500	77	209	483	1448	49
246	TALL	85V66-1	4500	77	252	533	1486	68
303	TALL	85V80-1	4500	77	389	584	1499	80
454	TALL	85V120-1	4500	77	395	718	1588	147

• Heaters furnished with standard 220/240 volt AC, 50/60Hz, single phase.

Recovery = wattage/1.16 x temp. rise °C.
 Example: $\frac{4500W}{1.16 \times 50^\circ} = 77$ liters per hour

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road, Montgomery, Alabama 36117-4305 • www.rheem.com